

Panasonic

P2HD

AJ-PX800G

Memory Card Camera Recorder "P2 cam"

AJ-PX800GH

Bundled with AG-CVF15G Color LCD Viewfinder

AJ-PX800GF

Bundled with AG-CVF15G Color LCD Viewfinder
and FUJINON 16x Auto Focus Lens



*The microphone and battery pack shown in the photo are optional accessories.

The Ultra **Light** Weight
3MOS Shoulder Camera Recorder

AVC **ULTRA** AVC **INTRA** AVC **Long G** AVC **Proxyl** P2 **XC** **HDMI**
HIGH-DEFINITION MULTIMEDIA INTERFACE

The world's lightest*¹ 2/3 type shoulder-type HD camera-recorder with three image sensors revolutionizes news gathering with high mobility, superb picture quality and network functions.



*Ultra-high Speed,
Ultra-high Quality and
Ultra-light Weight*

The AJ-PX800G is a new-generation camera-recorder for news gathering. It is network connectable and provides superb picture quality, high mobility and excellent cost-performance. Weighing only about 2.8 kg (main unit), the AJ-PX800G is the world's lightest*¹ shoulder-type camera-recorder equipped with three MOS image sensors for broadcasting applications. It also supports AVC-ULTRA multi-codec recording.*² The picture quality and recorded data rate can be selected from one of the AVC-ULTRA family of codec's (AVC-Intra/AVC-LongG) according to the application. Along with a Low-rate AVC-Proxy dual-codec recording ideal for network-based operation and off-line editing. Built-in network functions support wired LAN, wireless LAN*³ and 4G/LTE network connections,*⁴ enabling on-site preview, uploading data to a server and streaming. The AJ-PX800G is a single-package solution for virtually all broadcasting needs.

*1: For a 2/3-type shoulder-type HD camera-recorder with three sensors (as of August 2014).

*2: Not all AVC-ULTRA formats will be supported.

*3: For a wireless LAN connection, the AJ-WM30 Wireless Module is required.

*4: 4G/LTE module is required from a third party. Availability of this function may vary depends on areas. For details, please visit Panasonic website (<http://pro-av.panasonic.net/>)

The use of DCF Technologies is under license from Multi-Format, Inc.

Ultra-light Weight

The AJ-PX800G offers high mobility thanks to the world's lightest* weight. The camera section features three sensors, and provides high picture quality and advanced functions to respond to broadcasting needs.

The 2/3 type Shoulder-type Model

The AJ-PX800G is the world's lightest* in its class at approximately 2.8 kg (6.2 lb) for the main unit. This compact body provides superb mobility. It is also designed with excellent forward visibility.


*For a 2/3 type shoulder-type HD camera-recorder with three sensors (as of August 2014).

2/3 type Interchangeable Lenses

The 2/3 type bayonet mount interchangeable lens system lets you choose from a variety of 2/3 type zoom lenses for broadcasting and other professional uses from third-party manufacturers. Select the lens type and performance level that meets your needs.

High Sensitivity and Low Noise with 2/3 type 3MOS Image Sensors

The 2.2 megapixel 2/3 type 3MOS (RGB) image sensors offer full-pixel HD (1920 x 1080) resolution, F12 (59.94 Hz) or F13 (50 Hz) sensitivity and low noise with an S/N of 62 dB. It also achieves rich gradation and vibrant color reproduction.



2.2 megapixel 2/3 type 3MOS image sensor

High-Quality Image Processing and Versatile Image Settings

- **CAC (Chromatic Aberration Compensation):** When using a CAC compatible lens, the small amount of circumjacent chromatic aberration (circumjacent blur) that is not corrected by the lens is compensated by this process.
- **DRS (Dynamic Range Stretcher):** Suppresses blocked shadows and blown highlights to achieve a visually wide dynamic range.
- **Advanced Flash Band Compensation (FBC):** High-precision flash band detection and compensation.
- **Gamma:** Selectable from 7 modes of gamma curves.
- **Digital image settings:** H Detail, V Detail, Detail Coring, Skin Tone Detail, Chroma Level, Chroma Phase, Master Pedestal, Knee, Matrix (NORM1/NORM2/FLUO/CINE-LIKE), High Color, White Clip.

Professional Shooting Functions

- **Scan Reverse:** Displays/records images in vertically or horizontally inverted orientation.
- **Digital Zoom:** 2x/4x digital zoom.
- **Shutter:** Slow shutter, synchro scan function.
- **Optical ND Filters:** Four-position (CLEAR, 1/4 ND, 1/16 ND, 1/64 ND).

Versatile Shooting Assist Functions

- **User Interface "SmartUI":** User Interface consists of a LCD display and multiple switches. Multiple function can be set easily with minimum operation.
- **Focus Assist:** "EXPAND" for center zoomed image and "Focus-in-Red" can be displayed on viewfinder.
- **Focus Bar:** Focus level shown as bar.
- **Scene Files/User Files:** Scene files let you select either of six preset files from the menu on SmartUI according to the shooting situation and up to eight settings can be stored onto an SD memory card. Up to eight camera setting status can be stored to an SD memory card.
- **Gain:** Three-position gain selector with a maximum gain value of +42 dB. (Super gain)
- **User Buttons:** Frequently used functions can be assigned to the User buttons.
- **Shockless White Balance:** To enable smooth White Balance mode switching.
- **AWB:** Auto White Balance with auto tracking white function.
- Audio input level adjustment (front) can be switched on/off and allocated to desired channels.
- **WFM/Vectorscope:** Simplified waveform and vectorscope display.
- **Zebra:** Select any two levels from 0% to 109% in 1% steps.
- **Mode check:** Displays a list of the camera settings.
- **Y-GET:** Measures brightness at center and displays numerical data.
- The optional CVF15G Color HD Viewfinder, when opened, serves as an LCD monitor.
- **Marker Display:** Displays a center marker, safety zone marker and frame marker.



Ultra-high Quality

The recorder section offers AVC-ULTRA multi-codec recording capability and 2 slots for P2 cards.

AVC-ULTRA Codec Supported as Standard

From mastering to streaming, the image quality and bit rate can be selected to match the application. Panasonic's professional A/V codec family, AVC-ULTRA, is provided as standard to meet the particular needs of broadcasting and video production.

AVC Intra An intra-frame compression method that is highly suited to image production, AVC-Intra100/50.

AVC LongG An inter-frame compression method that achieves high-quality HD recording at a low bit rate. Ideal for providing on-air content direct from the shooting location and for workflows using content transferred over the internet. Three bit rates are available:

AVC-LongG50/25/12 Mbps. AVC-LongG25 provide 10 bit/4:2:2 quality at a bit rate of approximately 25 Mbps.

AVC Proxy Low-bit-rate, high-resolution, high-soundquality proxy video (Quick Time/H.264) is also recorded with the actual data.* Also includes metadata for efficient offline editing.

* Proxy data cannot be recorded when using the Loop Rec or Interval Rec function. Proxy data is low-resolution video and audio data with time code, metadata, and other management data in a file format.

The use of DCF Technologies is under license from Multi-Format, Inc.



HD/SD Multi Format/Multi Codec

The AJ-PX800G supports 59.94 Hz/50 Hz switching for convenient use in productions headed for global use, and records 1080/60i,* 50i, 24p,* 25p, 30p* and 720p HD/SD multiple format.

DVCPRO HD/DVCPRO50/DVCPRO/DV recording is also supported.

* 60i, 60p, 24p and 30p are actually 59.94i, 59.94p, 23.98p and 29.97p.

High-Quality 24 Bit Four Channel Audio Recording

AVC-Intra and AVC-LongG*¹ modes support 24bit/48kHz/4CH digital audio recording*². Audio source for each channel can be selected for each channel, choosing from mic-in, line-in and wireless receiver.

*1: The AVC-LongG12 mode does not support 24 bit digital audio recording.

*2: The audio signal can be played back by using 24 bit digital audio equipment.

For details, refer to "Note Regarding 24 bit Audio" on page 5.

Two Slots for Versatile Recording Option

• Using Memory Card Adapter AJ-P2AD1G, microP2 card can be used.

• **Simul Rec:** Records simultaneously onto two P2 cards.

• **Dual-codec recording:** Records a low-rate AVC-Proxy file while recording main data in AVC-Intra/AVC-LongG.

• **Hot-Swap Rec:** Thanks to the two card slots, you can hot-swap P2 cards for continuous non-stop recording.

• **One-Clip rec mode:***¹ Records up to 99 consecutive cuts as a single clip.

• **Loop rec:** Repeatedly re-records while maintaining a recording of the most recent, pre-determined period.

• **Pre-rec:***¹ Continuously stores footage prior to pressing Rec Start for recovery if desired.

• **Interval rec:** Automatically records intermittently based on a set interval and recording time.

• **One-shot rec:** A frame-shot recording function useful for producing animations.

• **Text Memo:***² Up to 100 memos can be posted onto a clip as bookmarks.

• **Shot Marker:***² Used to mark clips as OK, NG, etc.


• **Metadata:** Data with information such as operator's name, shooting location, and text memos can be added via an SD memory card.

• **Rec Check:** This lets you run a quick playback check of the clip-end you have just recorded.

*1: Not available in 24p, 25p and 30p recording modes.

*2: Shot marker and text memo cannot be used in loop rec, interval rec, or one-shot rec.

The use of DCF Technologies is under license from Multi-Format, Inc.



Ultra-high Speed

Network connectivity achieves a faster news workflow. It supports wired LAN, wireless LAN and 4G/LTE networks.

Wired/Wireless LAN Network Functions*1

The standard LAN (Ethernet) port allows network connection via a wired LAN. When the optional AJ-WM30 Wireless Module is installed, the AJ-PX800G gains wireless LAN (IEEE 802.11g/n) connectivity, enabling access to the following functions from a network-connected PC/Mac, tablet device or smartphone. The AJ-PX800G gives you a ready-to-use, cost-effective IT solution.

- **Proxy Preview:** Plays back proxy files (AVC-Proxy), downloads file/clip information, displays and allows editing of metadata, and enables addition/deletion of shot marks and text memos.*2
- **Camera Remote:** Allows confirmation of camera status and thumbnails and enables remote camera control (recording, time code setting, and user bits).
- **Playlist Editing (direct mode):** Playlists can be created using proxy video with a PC/Mac or tablet. The workflow can be streamlined to be faster by rough editing on location, and then transferring the content files. The results can be saved together with the edited playlist, then played out of the camera and/or copied using a web application.
- **File Transfer:** The FTP client function lets you transfer clips from the camera-recorder to a network.

*1: For the OS, browser, device compatibility information, see "Service and Support" on the Panasonic website (<http://pro-av.panasonic.net/>).

*2: Some functions are not supported by some devices.

The use of DCF Technologies is under license from Multi-Format, Inc.

4G/LTE* Network Connectivity

The AJ-PX800G can send data directly to a network server via FTP allowing broadcast stations to edit recorded data immediately at the editing desk.

*4G/LTE module is required from a 3rd party. Availability of this function may vary depends on areas. For details, please visit Panasonic website (<http://pro-av.panasonic.net/>)

Video Streaming Capability

The AJ-PX800G is capable of proxy image streaming via a wired LAN, wireless LAN, 4G/LTE*. It enables live streaming while recording images onto a memory card.

*Live streaming is not possible while dual codec recording.


The use of DCF Technologies is under license from Multi-Format, Inc.

HD SDI IN/OUT, HDMI OUT and Other Interfaces **HDMI**

- Supports SDI OUT for feed and backup recording with optional SDI IN for line recording.
- **HDMI OUT:** This terminal allows digital A/V output to a wide range of HD devices.
- **MON OUT:** This terminal outputs HD SDI, down-converted SD SDI, or VBS.
- **Aspect conversion:** Aspect ratio of down conversion signal can be selected from Side Crop, Letter Box or Squeeze mode.
- **TC IN/OUT:** A built-in SMPTE time code generator/reader. IN/OUT selectable by menu settings.
- **GENLOCK IN:** For synchronized recording with a multi-camera system.
- **USB 2.0:** Equipped with both HOST (for connection to an HDD) and DEVICE (for connection to a PC/Mac) terminals.
- UniSlot® compatible wireless receiver slot (two channels).
- **XLR audio input:** Two channel mic/line inputs supporting 48-V phantom power supply.
- Audio output terminals (pin jacks), two channels.
- Multiple battery support, including Anton Bauer.

*UniSlot® is a trademark of Ikegami Tsusinko Co., Ltd.


Camera Remote/Playlist Editing (Wireless LAN, Wired LAN)

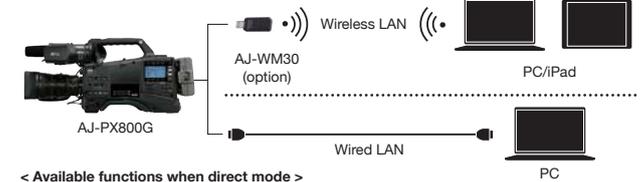


< Available functions when direct mode >



File Upload (Wireless LAN, 4G/LTE, Wired LAN)

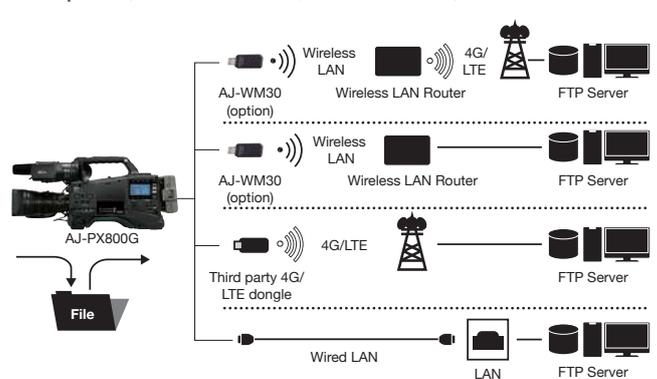

Streaming (Wireless LAN, 4G/LTE, Wired LAN)

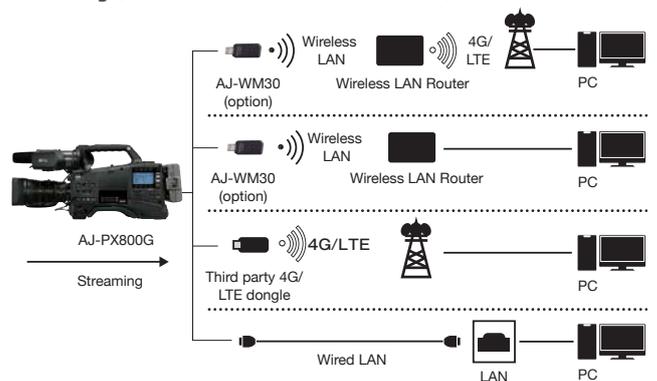

Camera Remote System Compatibility

- **10 pin Remote Terminal:** Camera remote operation is enabled with the optional AG-EC4G Extension Remote Control Unit or AJ-RC10G Remote Control Unit.*
- **Camera Studio System:** The optional camera extension system (AG-CA300G Camera Adapter and AG-BS300 Base Station) supports low-cost studio integration.
- **Wired LAN remote:** A wired LAN connection allows the camera to be remotely controlled. Remote operation, including fine menu settings, is possible by using the optional AK-HRP200G Remote Operation Panel for studio cameras.

* Only functions that are supported by the AJ-PX800G can be controlled.



AG-CVF10G
Color HD View Finder
Open one way for LCD
monitor viewing



AG-CVF15G
Color HD View Finder
Open two ways for LCD
monitor viewing



AJ-MC700P
Microphone Kit



AG-MC200G
XLR Microphone



SHAN-TM700
Tripod Adaptor



AG-YA600G
HD/SD SDI Input Board



AJ-WM30
Wireless Module



AK-HRP200G
Remote Operation Panel



AJ-P2E064FG
AJ-P2E032FG
AJ-P2E016FG
Memory Card
(P2 card F series)



AJ-PCD2G
USB2.0
Memory Card Drive



AU-XPD1 **NEW**
USB 3.0/2.0
Memory Card Drive

microP2 Card



AJ-P2M032AG
AJ-P2M064AG
Memory Card
"microP2 card"



AJ-P2AD1G
Memory Card Adapter



AJ-MPD1G
Memory Card Drive
"microP2 drive"



SD/SDHC/SDXC Memory
Card



AJ-SC900
Soft Carrying Case
*Not available in some area



SHAN-RC700
Rain Cover
*Not available in some area

P2 Viewer Plus
Viewing Software*2
Compatible with both Windows/Mac OS.

AJ-SK001G (for P2 Viewer plus)
Ingesting Function Software Key*2
 The ingesting function copies all clips on P2 cards to a storage medium, such as an HDD. During ingesting, the clips are verified for secure copying, with log files created.

Avid NLE Plug-In Software*1
(Avid Media Composer v6.5 or later)

AJ-PS001G
Software Key
for AVC-Proxy re-link.

AJ-PS002G
Software Key
for AVC-Intra50/100 P2 file export.

AJ-PS003G
Software Key
for AVC-LongG P2 file export.

AJ-PS004G
Software Key
for AVC-LongG file import to edit.

Other Manufacturers' Products



Anton/Bauer
Dionic Battery

Camera Studio System



BNC cables transmit degradation-free HD digital images up to 100 meters (328 feet) in addition to giving you full remote control.

AG-CA300G
Camera Adapter

AG-BS300
Base Station

AG-YA500G
VF Interface Box

AG-EC4G
Extension Control Unit

AJ-RC10G
RCU (Remote Control Unit)
with 10 meters (32 feet) remote control
cable

AJ-C10050G
Remote Control Cable
(50 meters / 164 feet)

AJ-RC10G
Bound Cable for Camera Studio System
(between AG-BS300 and AG-CA300G)
[Canare]
V2PCS25-5CFWCE-SF-SC (25 meters/82 feet)
V2PCS50-5CFWCE-SF-SC (50 meters/164 feet)
V2PCS100-5CFWCE-SF-SC (100 meters/328 feet)
Power Cable for Camera Studio System
(between AG-BS300 and AG-CA300G)
[Canare]
DC50V10-CE01PS-SC (50 meters/164 feet)
DC100V10-CE01PS-SC (100 meters/328 feet)

Canare Electric Co., Ltd.
<http://www.canare.co.jp/oversea/mainmenu.html>

*1: For information on purchasing software keys, see "Service and Support" on the Panasonic web site (<http://pro-av.panasonic.net/>).

*2: For P2 Viewer Plus download and operating requirement information, see "P2 Viewer Plus" on the Panasonic web site (http://pro-av.panasonic.net/en/sales_o/p2/p2viewerplus/).

Note Regarding 24 bit Audio

Clips recorded using 24 bit audio must be played back with 24 bit compatible P2 equipment or the P2 Viewer Plus. If clips are played back with equipment not compatible with 24 bit audio, the clip number will be indicated in red and the clips will not be played back. For the latest information on 24 bit compatible P2 equipment and P2 Viewer Plus, see "Support & Download" on the Panasonic web page <http://pro-av.panasonic.net/>

Specifications

As of August, 2014

General

Power:	DC 12 V (11.0 V to 17.0 V)
Power Consumption:	22 W (when the optional board AG-YA600G is installed)
Operating Temperature:	0°C to 40°C (32°F to 104°F)
Operating Humidity:	10% to 85% (relative humidity)
Storage Temperature:	-20°C to 60°C (-4°F to 140°F)
Weight:	Approx. 2.8 kg (6.2 lbs.) (body only, excluding the battery and accessories)
Dimensions:	144 mm (W) × 267 mm (H) × 350 mm (D) (5-21/32 inches × 10-1/2 inches × 13-25/32 inches) Body only, excluding protrusion

Camera Unit

Pickup Device:	2/3 type 2.2 million pixels, MOS × 3
Lens Mount:	2/3 type bayonet
ND Filter:	1: CLEAR, 2: 1/4ND, 3: 1/16ND, 4: 1/64ND
Gain Setting:	NORMAL mode: -3 dB, 0 dB, 3 dB, 6 dB, 9 dB, 12 dB, 15 dB, 18 dB, 21 dB, 24 dB, 27 dB, 30 dB HIGH SENS mode: -6 dB, -3 dB, 0 dB, 3 dB, 6 dB, 9 dB, 12 dB, 15 dB, 18 dB, 21 dB, 24 dB, 27 dB, 30 dB
Super Gain (S.GAIN):	Selectable from 30 dB, 36 dB, 42 dB
Shutter Speed:	60i/60p mode: 1/60 (OFF) sec., 1/100 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec., 1/2000 sec. 30p mode: 1/30 (OFF) sec., 1/50 sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec. 24p mode: 1/24 (OFF) sec., 1/50 sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec. 50i/50p mode: 1/50 (OFF) sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec., 1/2000 sec. 25p mode: 1/25 (OFF) sec., 1/50 sec., 1/60 sec., 1/120 sec., 1/250 sec., 1/500 sec., 1/1000 sec.
Synchro Scan Shutter:	60i/60p mode: 1/60.0 sec. to 1/250.0 sec. 30p mode: 1/30.0 sec. to 1/250.0 sec. 24p mode: 1/24.0 sec. to 1/250.0 sec. 50i/50p mode: 1/50.0 sec. to 1/250.0 sec. 25p mode: 1/25.0 sec. to 1/250.0 sec.
Slow Shutter Speed:	60i/60p mode: 1/15 sec., 1/30 sec. 30p mode: 1/15 sec. 24p mode: 1/12 sec. 50i/50p mode: 1/12.5, 1/12.5 sec. 25p mode: 1/12.5 sec.
Shutter Open Angle:	3.0 deg to 360.0 deg (in 0.5 deg steps, angle display)
Sensitivity:	NORMAL mode: F9 (2000 lx, 3200 K, 89.9% reflection, 1080/59.94i) F10 (2000 lx, 3200 K, 89.9% reflection, 1080/50i) HIGH SENS mode: F12 (2000 lx, 3200 K, 89.9% reflection, 1080/59.94i) F13 (2000 lx, 3200 K, 89.9% reflection, 1080/50i)
Minimum Subject Illumination:	Approx. 0.22 lx (HIGH SENS MODE, F1.4, +42 dB (S.GAIN))
Image S/N:	62 dB (standard)
Horizontal Resolution:	1000 TV or higher (center)

Memory Card Recorder

Recording Media:	P2 card (for microP2 card: adaptor is required)
System Format:	1080/59.94i, 1080/23.98pF, 720/59.94p, 480/59.94i, 1080/50i, 720/50p, 576/50i
Recording Format:	AVC-Intra100/AVC-Intra50/AVC-LongG50/AVC-LongG25/AVC-LongG12/DVCPRO HD/DVCPRO50/DVCPRO/DV formats switchable
Recording Video Signal:	1080/59.94i, 1080/29.97pN, 1080/23.98pN, 720/59.94p, 720/29.97pN, 720/23.98pN, 480/59.94i, 480/29.97p, 1080/50i, 1080/25pN, 720/50p, 720/25pN, 576/50i, 576/25p
Recording/Playback Time*:	16GB × 1 32GB × 1 64GB × 1 AVC-Intra100: Approx. 16min. Approx. 32min. Approx. 64min. AVC-Intra50: Approx. 32min. Approx. 64min. Approx. 128min. AVC-LongG50: Approx. 32min. Approx. 64min. Approx. 128min. AVC-LongG25: Approx. 64min. Approx. 128min. Approx. 256min. AVC-LongG12: Approx. 120min. Approx. 240min. Approx. 480min. DVCPRO HD: Approx. 16min. Approx. 32min. Approx. 64min. DVCPRO 50: Approx. 32min. Approx. 64min. Approx. 128min. DVCPRO/DV: Approx. 64min. Approx. 128min. Approx. 256min.

These are reference values for continuous recording using the Panasonic products. The recording time may differ depending on the scene or the number of clips.

Digital Video

Sampling Frequency:	AVC-Intra100/AVC-LongG50/AVC-LongG25/AVC-LongG12/DVCPRO HD: Y: 74.1758 MHz, Pb/Pr: 37.0879 MHz (59.94 Hz) Y: 74.2500 MHz, Pb/Pr: 37.1250 MHz (50 Hz) DVCPRO50: Y: 13.5 MHz, Pb/Pr: 6.75 MHz DVCPRO: Y: 13.5 MHz, Pb/Pr: 3.375 MHz
Quantizing:	AVC-Intra100/AVC-Intra50/AVC-LongG50/AVC-LongG25: 10 bit AVC-LongG12/DVCPRO HD/DVCPRO50/DVCPRO/DV: 8 bit
Video Compression Format:	AVC-Intra100/AVC-Intra50: MPEG-4 AVC/H.264 Intra Profile AVC-LongG50/AVC-LongG25/AVC-LongG12: MPEG-4 AVC/H.264 DVCPRO HD/DVCPRO50/DVCPRO: DV-Based Compression DV: DV Compression

Digital Audio

Recording Audio Signal:	AVC-Intra100/AVC-Intra50: 48 kHz/16 bit, 4CH and 48 kHz/24 bit, 4CH switch AVC-LongG50/AVC-LongG25: 48 kHz/24 bit, 4CH AVC-LongG12/DVCPRO HD/DVCPRO50/DVCPRO/DV: 48 kHz/16 bit, 4CH
Headroom:	18 dB/20 dB (switchable with menu)

Proxy

Video Compression Format:	H.264/AVC Baseline Profile, H.264/AVC High Profile
Audio Compression Format:	AAC-LC, Linear PCM
Approx. Recording Time*:	AVC-G6 2CH MOV: Approx. 13 min. SHQ 2CH MOV: Approx. 25 min. HQ 2CH MOV: Approx. 78 min. LOW 2CH MOV: Approx. 135 min.

These are reference values for continuous recording using the Panasonic products. The recording time may differ depending on the scene or the number of clips.

Video Input/Output

SDI OUT/IN (option):	BNC×1 1.5 G HD SDI: 0.8 V [p-p], 75 Ω SD SDI: 0.8 V [p-p], 75 Ω
MON OUT:	BNC×1 (Can be switched to HD SDI/SD SDI/analog composite on SmartUI.) 1.5 G HD SDI: 0.8 V [p-p], 75 Ω SD SDI: 0.8 V [p-p], 75 Ω Composite: 1.0 V [p-p], 75 Ω
HDMI OUT:	HDMI×1 (HDMI type A terminal, not compatible with VIERA Link)

Audio Input/Output

Audio IN:	XLR (3 pin) × 2 LINE/MIC (switch selection) LINE: 0 dBu MIC: -50 dBu/-60 dBu (menu selection), +48 V ON/OFF (switch selection)
MIC IN:	XLR (3 pin) × 1, +48 V supported (selectable menu) -40 dBu/-50 dBu/-60 dBu (selectable menu)
Wireless IN:	25 pin, D-SUB, -40 dBu, 2CH supported
Audio OUT:	Pin jack × 2 (CH1, CH2), Output level: 600 Ω, 316 mV
Phones OUT:	3.5 mm diameter stereo mini jack × 1
Speaker:	20 mm diameter, round × 1

Other Input/Output

GENLOCK IN:	BNC×1, 1.0 V [p-p], 75 Ω
TC IN/OUT:	BNC×1, IN/OUT switch selection IN: 0.5 V [p-p] to 8 V [p-p], 10 kΩ OUT: 2.0 ±0.5 V [p-p], Low impedance
DC IN:	XLR×1, 4 pin, DC 12 V (DC 11.0 V to 17.0 V)
DC OUT:	4 pin, DC 12 V (DC 11.0 V to 17.0 V), maximum output current 1.5 A
REMOTE:	10 pin
Lens:	12 pin
VF:	20 pin
LAN:	100BASE-TX/10BASE-T
USB2.0 (host):	Type A connector, 4 pin
USB2.0 (device):	Type B connector, 4 pin
USB2.0 (sub host):	Type A connector, 4 pin (exclusively for wireless module AJ-WM30)

Included Accessories

Shoulder strap, Mount cap

Weight and dimensions shown are approximate. Specifications are subject to change without notice.

* Time shown above is when you record a series of 1 shot to a P2 card. Depending on numbers of shots you record, the time will get shorter than the number shown above.



P2 Asset Support System

The free member's service program for P2HD/AVCCAM

Extensive information for video professionals

Thirsty for Knowledge?

No purchase necessary
Information services for members

- ▶ The latest technical information
- ▶ FAQs, user's voices
- ▶ Tool download

Always the best performance

Additional content with product registration

- ▶ Firmware, utility downloads
- ▶ Quick inspection, service history
- ▶ Newsletters

Contact us through PASS

Direct answers to your inquiries. Sign up now (no purchase necessary)

http://panasonic.biz/sav/pass_e



5 year extended warranty program

1st year Basic Warranty

2nd year

3rd year

4th year

5th year with the warranty program



Extended for free upon registration

* Availability of this extended service program and service content may depend on country/region and model.

* A maximum 5 year or pre-specified hours of operation from the date of purchase, whichever comes first.

* Not all repair work is covered by this extended warranty program.

Informative product-related content also available with equipment registration.

Please refer to the latest Non-linear Compatibility Information, P2 Support, Download and Service Information, etc. at the following Panasonic web site.



<http://pro-av.panasonic.net/>

Notes Regarding the Handling of P2 Files Using a PC

Mounting and Transferring Files

The PC must be installed with the included P2 driver in order to recognize, copy and transfer P2 files. This driver is also necessary when using the PC card slot and when handling P2 files stored on a hard-disk device, such as P2 store. For other operating requirements, refer to the P2 installation manual. The P2 driver and the P2 installation manual can be downloaded free from a Panasonic website. Visit <http://pro-av.panasonic.net/> and click "P2 Support and Download."

Preview and Nonlinear Editing

To preview (play) P2 files on a PC, it is necessary to install P2 Viewer Plus software (downloadable for free, for Windows and Mac), both from Panasonic, or P2-compatible editing software available from other companies (for details, visit http://pro-av.panasonic.net/en/sales_o/p2/partners.html). Note that each software places specific requirements on the operating environment, and the operating environment must meet additional requirements to play and edit HD content on Windows PCs and Macs. For P2 Viewer Plus download and operating requirement information, visit <http://pro-av.panasonic.net/>. For operating requirements and details of other P2 editing software, visit the website of the relevant software manufacturer.

Precautions When Using SD Memory Cards

On the Memory Card Camera Recorder, use SD memory cards that conform to the SD standard, SDHC standard, or the SDXC standard. When performing proxy recording (extra-cost option), use SDHC memory cards, SDXC memory cards, or Panasonic SD memory cards with the class description of class2 or higher. The MMC (Multi Media Card) cannot be used. Be sure to format cards on the Memory Card Camera Recorder before use. In this Memory Card Camera Recorder, memory card of the capacity of SD (8 MB to 2 GB), SDHC (4 GB to 32 GB), and SDXC (32 GB to 128 GB) can be used.

**P2HD, "AVC-Intra", "AVC-LongG", "AVC-Proxy", "DVCPRO HD", "DVCPRO 50" and "DVCPRO" logos are registered trademarks of Panasonic Corporation. SDHC logo and SDXC logo are trademarks of SD-3C, LLC. Quick Time is a trademark of Apple, Inc., registered in the U.S. and other countries.



[Countries and Regions]

Panasonic Corporation
AVC Networks Company
2-15 Matsuba-cho, Kadoma, Osaka 571-8503
Japan
<http://pro-av.panasonic.net/>

Argentina	+54 11 4122 7200
Australia	+61 (0) 2 9491 7400
Bahrain	+973 252292
Brazil	+55 11 3889 4035
Canada	+1 905 624 5010
China	+86 10 6515 8828
Hong Kong	+852 2313 0888
Czech Republic:	+421 (0) 903 447 757
Denmark	+45 43 20 08 57
Egypt	+20 2 23938151
Finland, Latvia, Lithuania, Estonia	+358 (9) 521 52 53
France	+33 (0) 1 47 91 64 00
Germany, Austria, Switzerland	+49 (0) 6103 313887
Greece	+30 210 96 92 300
Hungary	+36 (1) 382 60 60
India	+91 1860 425 1860
Indonesia	+65 6277 7784
Iran (Vida)	+98 21 2271463
(Panasonic Office)	+98 2188791102
Italy	+39 02 6788 367
Jordan	+962 6 5859801
Kazakhstan	+7 727 298 0891
Korea	+82 2 2106 6641
Kuwait	+96 522431385

Lebanon	+96 11665557
Malaysia	+60 3 7809 7888
Mexico	+52 55 5488 1000
Netherlands, Belgium	+31 73 640 2729
New Zealand	+64 9 272 0100
Norway	+47 67 91 78 00
Pakistan	+92 5370320 (SNT)
Palestine	+972 2 2988750
Panama	+507 229 2955
Philippines	+65 6277 7284
Poland	+48 (22) 338 1100
Portugal	+351 21 425 77 04
Romania, Albania, Bulgaria, Macedonia	+40 (0) 729 164 387
Russia & CIS	+7 495 9804206
Saudi Arabia	+96 626444072
Singapore	+65 6277 7284
Slovak Republic, Croatia, Serbia, Bosnia, Montenegro, Slovenia	+421 (0) 903 447 757
South Africa	+27 11 3131622
Spain	+34 (93) 425 93 00
Sweden	+46 (8) 680 26 41
Syria	+963 11 2318422/4
Taiwan	+886 2 2227 6214
Thailand	+662 731 8888

Turkey	+90 216 578 3700
U.A.E. (for All Middle East)	+971 4 8862142
Ukraine	+380 44 4903437
U.K.	+44(0)1344 70 69 13
U.S.A.	+1 877 803 8492
Vietnam	+65 6277 7284



JQA-0443



Factories of AVC Networks Company have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)