


# Optical Fiber Camera System

**SWIT®**

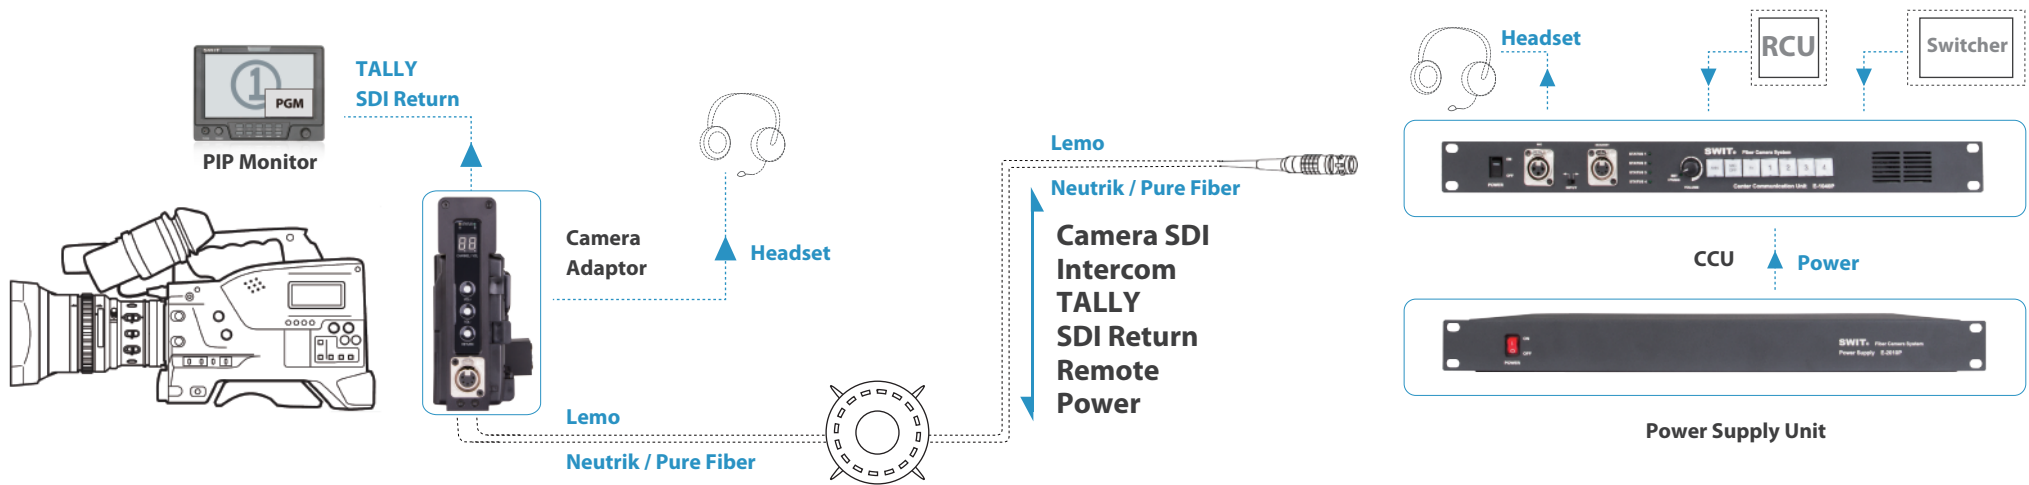

## 4-ch Center Communication Unit

- CCU of the System
- 19" 1U includes 4 camera channels
- Allow cascading for more channels
- Lemo or Neutrik input for option
- SONY/Panasonic Camera Remote input
- TALLY and return SDI input
- Build-in Intercom control panel
- Headset and Microphone input



## Camera Optical Adaptor

- Camera Adaptor of the System
- Lemo / Neutrik connection optional
- Camera SDI input and loop output
- Switcher Return SDI output
- Return SDI on/off control
- TALLY display and output to monitor
- Headset input, Volume adjustment
- Sony / Panasonic camera remote
- V-mount or Gold mount installation



## Return SDI Monitor

- 7-inch 1024×600 LCD panel
- 2x HD/SD-SDI, 1x HDMI input
- Pic-in-Pic display return SDI
- DB9 input TALLY and Power
- Front and Rear TALLY light
- Waveform / Vector scope
- Peaking focus assist
- 16-ch embedded audio meters



## Power Supply Unit

- Power Supply Unit of the System
- 19" 1U standard rack mount
- AC 100-240V or DC 120-370V input
- Main and Back Up power input
- DC 48V 9A power output to CCU
- Build-in multiple power protection



## Remote Control Unit

- 4-ch Remote Control Unit
- 19" 1U standard rack mount
- Support both SONY and Panasonic
- Aperture / Master black level / B&W balance / GAIN adjustment