

**Panasonic**  
ideas for life

**BT-LH80W**  
LCD Video Monitor





## Broadcast-Grade Performance Plus Focus Assist and a Viewfinder Terminal Ideal for On-camera and Field Applications, including Mobile Vehicles

The BT-LH80W is a small, lightweight HD/SD LCD monitor designed for field acquisition or live relay use. Inheriting circuitry from the popular BT-LH1700W, this versatile monitor delivers a full broadcast-grade display performance. It also introduces new Focus-in-Red and Pixel-to-Pixel functions that make critical HD camera focusing quick and easy. Connecting directly to the viewfinder terminal of a Panasonic HD camera-recorder, the BT-LH80W provides powerful support as a wide 7.9-inch color viewfinder. Its high performance and versatile functions also make it ideal for use in mobile vehicles.



front



rear

## Outstanding Display Performance

with circuitry inherited from the BT-LH1700W

### I/P Conversion Circuit for Motion Response

A new I/P conversion algorithm reduces the delay time between the input signal and the monitor to a length of less than one field.

### Diagonal Line Compensation

Jagged noise on diagonal lines in moving images is a common problem. The BT-LH80W solves this by detecting correlations in the diagonal direction, resulting in smooth, precision reproduction of moving images.

### High-Speed Response

The BT-LH80W incorporates an overdrive circuit that improves response in intermediate gradations, allowing it to display vivid images with no blurring, especially during scenes with motion.

### HD/SD Multi-Format Compatibility

Compatible with most HD and SD formats, the BT-LH80W is ideal for a wide range of applications in locations around the world.

## Focus Assist Functions for HD Shooting

### Focus-in-Red

This function emphasizes the sharply focused area of the image by showing it in an easily visible red, making it easier to focus the camera.



ON Image



OFF Image

### Pixel-to-Pixel

This function lets you see the input signal in a pixel to pixel relationship without resizing, making it easier to make focus adjustments. With 1080/60i input signals, you can check the focus with a screen width equivalent to 19 inches.

## Useful Functions

### Waveform Monitoring

The input signal is displayed as a waveform for monitoring. Display of the waveform can be displayed in the lower right portion of the screen.



### Cross Hatch

Simple Cross Hatch overlay display (at 50 dots interval, fixed) to check the tilt of camera. You can allocate the cross hatch function to any of the three "Function" keys.



### Other Useful Functions

- Tally lamps (front: red/green, back: red)
- Marker and blue-only functions
- Compatible with 16:9 and 4:3 aspect ratios
- RS-232C and GPI remote control terminals

## Interfaces and Design Suited to the Field

### Thin, Small and Lightweight

Making full use of the LCD panel's thinness and light weight, the BT-LH80W is only 2-5/8" (65 mm) deep and weighs just 3.3 lbs (1.5kg).

### DC Operation and Low Power Consumption

DC operation (Anton Bauer/DC IN) makes the BT-LH80W ideal for use outdoors. Power consumption is very low, despite its HD/SD compatibility.

### Connection as a Viewfinder


BNC cable connection also makes it possible to use SDI (optional) or component input not only from Panasonic camera-recorders but also from other brand cameras.

Equipped with a 15-pin viewfinder terminal, the BT-LH80W can also be used as a viewfinder for compatible Panasonic camera-recorders — AJ-HDX900, AJ-HDC27H, AJ-HPX2000/2100 and AG-HPX500/502. You can also run the BT-LH80W on DC power supplied by these camera-recorders. Connection is easy, requiring only a viewfinder cable and DC power cable.

### Supported Video Format

Input Signal	VIDEO	VF-VIDEO	VF-YPBPR	YPBPR	SDI (option)
NTSC	yes	yes			
PAL	yes	yes			
480/59.94i			yes	yes	yes
480/59.94P			yes	yes	
576/50i			yes	yes	yes
576/50P			yes	yes	
720/50P			yes	yes	yes
720/59.94P			yes	yes	yes
720/60P			yes	yes	yes
1035/59.94i*			yes	yes	yes
1035/60i*			yes	yes	yes
1080/23.98Psf			yes	yes	yes
1080/24Psf			yes	yes	yes
1080/50i			yes	yes	yes
1080/59.94i			yes	yes	yes
1080/60i			yes	yes	yes

\*Indicates display with 1080/59.94i or 1080/60i, instead of 1035/59.94i or 1035/60i

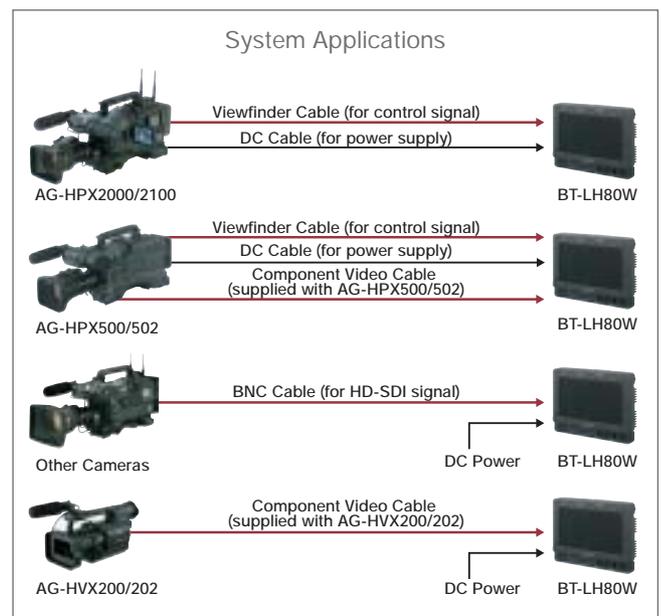

\*Mounting bracket is required to mount on a Camera-Recorder.

## Optional Accesories



**BT-YA80G**  
SDI INPUT UNIT



**BT-CS80G**  
VF Cable  
(Viewfinder Cable, DC Cable)

## Specifications

Power Requirements: DC12V (11 to 17V)  
DC Input (XLR 4-pin) or Anton Bauer Battery

Power Consumption: DC12V, 1.5A

Weight: 3.3 lbs (1.5kg)

Dimensions:  
(W x H x D) 8-3/4" x 6-11/16" x 2-5/8"  
(218 x 166 x 65 mm)

LCD Panel: 7.9", 16:9 aspect ratio

Display colors: 16,770,000 colors

Resolution: 800 x 450 pixels

Viewing Angle: 110° Vertical, 120° Horizontal

Video Input: VIDEO, Y/Pb/Pr (BNC), 1 ch  
Viewfinder terminal (15-pin)





Remote: GPI (D-sub 9-pin), RS-232C (D-sub 9-pin)

Option: SDI INPUT UNIT,  
VF cable (Viewfinder Cable, DC Cable)

\*The specifications shown above are subject to change without notice

## Dimensions

(unit: mm)

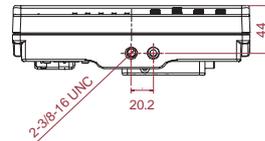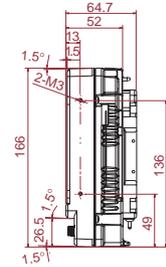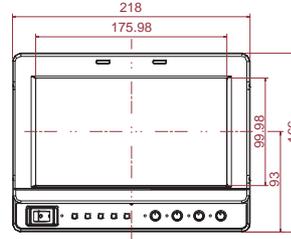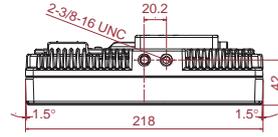

# Panasonic®

**Matsushita Electric Industrial Co., Ltd.**  
**Systems Business Group**  
2-15 Matsuba-cho, Kadoma, Osaka 571-8503  
Japan  
Phone +81 6 6905 4650 Fax +81 6 6908 5969  
<https://www.pavc.panasonic.co.jp/pro-av/>

### [Countries and Regions]

Argentina	+54 1 308 1610
Australia	+61 2 9986 7400
Austria	+43 (0)1 610 80 773
Bahrain	+973 252292
Belgium	+32 (0)2 481 04 57
Bulgaria	+359 2 946 0786
Brazil	+55 11 3889 4035
Canada	+1 905 624 5010
China	+86 10 6515 8828
(Hong Kong	+852 2313 0888)
Czech Republic	+420 236 032 552/511
Denmark	+45 43 20 08 57
Egypt	+20 2 3938151
Finland, Latvia, Lithuania, Estonia	+358 (9)521 52 53
France	+33 (0)1 55 93 66 67
Germany	+49 (0)611 235 401
Greece	+30 210 96 92 300
Hungary	+36 (1)382 60 60
Indonesia	+62 21 385 9449
Iran	+98 21 2271463
Italy	+39 02 67 88 449
Jordan	+961 6 586 1914
Kazakhstan	+7 3272 504 777
Korea	+82 2 2106 6641

Kuwait	+965 481 2123
Lebanon	+961 1 216827
Malaysia	+60 3 5549 5422 (PSE)
	+60 3 5546 7000 (PM)
Mexico	+52 55 5488 1000
Montenegro, Serbia	+381 11 614 0000
Netherlands	+31 73 64 02 577
New Zealand	+64 9 272 0100
Norway	+47 67 91 78 00
Pakistan	+92 5370320 21
Panama	+507 229 2955
Peru	+51 1 614 0000
Philippines	+63 2 633 6162
Poland	+48 (22)338 1100
Portugal	+351 21 425 77 04
Puerto Rico	+1 787 750 4300
Romania	+40 21 211 4855
Russia & CIS	+7 095 258 42 06
Saudi Arabia	+966 1 465 0709
Singapore	+65 6270 0110
Slovak Republic	+421 (0)2 52 92 14 23
Slovenia, Croatia, Bosnia, Macedonia	+386 1 426 1111
	+44 (0)20 76 63 36 57
South Africa	+27 11 313 1400

Spain	+34 (93) 425 93 00
Sweden	+46 (8) 680 26 41
Switzerland	+41 (0)41 259 96 32
Taiwan	+886 2 2725 9100
Thailand	+66 2 731 8888
Turkey	+90 216 578 3700
U.A.E.	+971 4 282201
Ukraine	+380 44 4903437
	+380 44 4903438
	[ext. 112]
U.K.	+44 (0) 1344 70 69 20
U.S.A.	+1 201 348 5300



Factories of Systems Business Group have received ISO14001:2004-the Environmental Management System certification.